GSFC JPSS CMO November 10, 2014 Released Effective Date: October 23, 2014 Block/Revision 0200A1

Joint Polar Satellite System (JPSS) Ground Project Code 474 474-00448-02-08-B0200

Joint Polar Satellite System (JPSS) Algorithm Specification Volume II: Data Dictionary for the Geolocation and Spacecraft Orientation

Block 2.0.0



Goddard Space Flight Center Greenbelt, Maryland

National Aeronautics and Space Administration

Joint Polar Satellite System (JPSS) Algorithm Specification Volume II: Data Dictionary for the Geolocation and Spacecraft Orientation JPSS Review/Approval Page

Prepared By:				
PSS Ground System				
Approved By:				
Robert Morgenstern JPSS Ground Project Mission Systems Engineering Manager (Electronic Approvals available online at https://jpssmis.gsfc.nasa.gov/frontmenu	Date dsp.cfm)			
Approved By:				
Daniel S. DeVito	Date			
JPSS Ground Project Manager (Electronic Approvals available online at https://jpssmis.gsfc.nasa.gov/frontmenu	den ofm)			
(Electronic Approvals available online at <u>https://jpssnins.gsic.nasa.gov/frontmenu</u>	_usp.ciiii)			

Goddard Space Flight Center Greenbelt, Maryland

Preface

This document is under JPSS Ground ERB configuration control. Once this document is approved, JPSS approved changes are handled in accordance with Class I and Class II change control requirements as described in the JPSS Configuration Management Procedures, and changes to this document shall be made by complete revision.

Any questions should be addressed to:

JPSS Configuration Management Office NASA/GSFC Code 474 Greenbelt, MD 20771

Change History Log

Revision	Effective Date	Description of Changes (Reference the CCR & CCB/ERB Approve Date)	Sections Affected
0200-	Aug 30, 2013	This version incorporates 474-CCR-13-1193 which was approved by JPSS Ground ERB on the effective date shown.	All
0200A	Jan 30, 2014	This version incorporates 474-CCR-13-1403 which was approved by JPSS Ground ERB on the effective date shown.	All
0200A1	Oct 23, 2014	This version incorporates 474-CCR-14-2091 which was approved by JPSS Ground ERB on the effective date shown. This version was baselined in support of Change Order 10.	All

List of TBx Items

TBx	Type	ID	Text	Action
1	TBD	SRS.02.08_252	The following paragraphs	Document numbers are
			describe the structure and	TBD for the JPSS-2
			contents of the RDR granules	
			formed by the JPSS ground	
			processing software. The ground	
			processing software generates	
			several RDRs for each sensor by	
			accumulating one or more	
			specific APs into a single	
			collection. The accumulated APs	
			are not byte-aligned or otherwise	
			altered. They are merely	
			collected and placed into storage	
			in the order that they are received.	
			The following paragraphs	
			describe the binary packaging	
			structure for these accumulated	
			APs. Table 4.1-1, Common RDR	
			Structure, shows the common	
			JPSS RDR Structure. All JPSS	
			RDRs are based on the same	
			generic granule storage	
			framework and is illustrated	
			conceptually in Figure 4.1-1	
			Common RDR Layout.	
			The detailed structure and	
			contents of the APs are	
			documented in the Mission Data	
			Format Control Book (MDFCB)	
			for each mission, GSFC 429-05-	
			02-42 for S-NPP, 472-00251 for	
			JPSS-1, and 472-TBD2 for JPSS-	
			2. For more information on AP	
			formatting, see the Recommendations for Advanced	
			Orbiting Systems, Networks and	
			Data Links, CCSDS 701.0-B-2, Section 3.3.3.	
			Note: All multi-byte structures	
2	TBD	SDS 02 00 1522	are in Big Endian.	Dogument numbers are
~	ממז	SRS.02.08_1523	Table 4.4.1.2-1, JPSS-2	Document numbers are
			Spacecraft Telemetry RDR	TBD for the JPSS-2

			Application Packets, lists the APs accumulated for the JPSS-2 Spacecraft Telemetry RDR. The APID assignment listed in Table 4.4.1.2-1, JPSS-2 Spacecraft Telemetry RDR Application Packets, applies to JPSS-2 only. In the event of a discrepancy in APIDs listed here, see the JPSS-2 MDFCB, 472-00TBD.	
3	TBD	SRS.02.08_1427	JPSS-2 Spacecraft Telemetry RDR Application Packets (TBD3)	Define Section
4	TBD	SRS.02.08_1626	Table 4.4.2.2-1, JPSS-2 RDR Spacecraft Ephemeris and Attitude Application Packets, lists the APs accumulated for the Spacecraft Diary group for JPSS- 2. In the event of a discrepancy see the JPSS-2 MDFCB, 472- 00TBD.	Document numbers are TBD for the JPSS-2
5	TBR	SRS.02.08_1627	JPSS-2 RDR Spacecraft Ephemeris and Attitude Application Packets (TBR)	Define Section
6	TBD	SRS.02.08_1628	The Spacecraft Ephemeris data points within the granule are sampled at 0.1 Hz and the Attitude data points are sampled at 2 Hz; refer to the JPSS-2 MDFCB, 472-00TBD, for further details.	Document numbers are TBD for the JPSS-2

Table of Contents

1	Intro	oduction	1	1
	1.1	Scope		1
	1.2	Purpo	se	1
	1.3	Organ	iization	1
2	Rela	ited Doo	cumentation	2
	2.1	Parent	t Documents	2
	2.2	Applic	cable Documents	2
	2.3	Inforn	nation Documents	2
3	UM	L for H	DF5 Products	4
	3.1	RDR I	HDF5 Details	4
	3.2	RDR S	Spacecraft Ephemeris and Attitude Data	6
4	JPS3	S Raw I	Data Records (RDRs)	8
	4.1	Comn	non RDR Structures	8
		4.1.1	Geolocation and Spacecraft Orientation RDR Overview	9
	4.2	S-NPF	P Spacecraft RDRs	10
		4.2.1	S-NPP Spacecraft Telemetry RDR	11
			4.2.1.1 S-NPP Spacecraft Telemetry RDR HDF5 Files	11
			4.2.1.2 S-NPP Spacecraft Telemetry RDR Data Content Summary	
		4.2.2	S-NPP Spacecraft Attitude and Ephemeris RDR	12
			4.2.2.1 S-NPP Spacecraft Attitude and Ephemeris RDR HDF5 Files	
			4.2.2.2 S-NPP Spacecraft Attitude and Ephemeris Data Content Summa	
		4.2.2		
	4.0	4.2.3	S-NPP RDR Spacecraft Ephemeris and Attitude Application Packets	
	4.3		1 Spacecraft RDRs	
		4.3.1	JPSS-1 Spacecraft Telemetry RDR	
			4.3.1.1 JPSS-1 Spacecraft Telemetry RDR HDF5 Files	
		4 2 2	4.3.1.2 JPSS-1 Spacecraft Telemetry RDR Data Content Summary	
		4.3.2	JPSS-1 Spacecraft Attitude and Ephemeris RDR	
			4.3.2.1 JPSS-1 Spacecraft Attitude and Ephemeris RDR HDF5 Files	
			4.3.2.2 JPSS-1 Spacecraft Attitude and Ephemeris Data Content Summa	
	4.4	IPSS_	2 Spacecraft RDRs	
	7.7	4.4.1	JPSS-2 Spacecraft Telemetry RDR	
		1.1.1	4.4.1.1 JPSS-2 Spacecraft Telemetry RDR HDF5 Files	
			4.4.1.2 JPSS-2 Spacecraft Telemetry RDR Data Content Summary	
		4.4.2	JPSS-2 Spacecraft Attitude and Ephemeris RDR	
				1

Block/Revision 0200A1

		4.4.2.1	JPSS-2 Spacecraft Attitude and Ephemeris RDR HDF5 Files	17
		4.4.2.2	JPSS-2 Spacecraft Attitude and Ephemeris Data Content Summ	
4.5		1	cecraft RDRs	
	4.5.1	GCOM-	W1 Spacecraft Telemetry RDR	
		4.5.1.1	ı	
		4.5.1.2	GCOM-W1 Spacecraft Telemetry RDR Data Content Summar	y 18
	4.5.2	GCOM-	W1 Spacecraft Attitude and Ephemeris RDR	19
		4.5.2.1	GCOM-W1 Spacecraft Attitude and Ephemeris RDR HDF5 Fi	les 19
		4.5.2.2	GCOM-W1 Spacecraft Attitude and Ephemeris RDR Data Cor	
			y	
			cords (TDRs)	
			(SDRs)	
7 Lo	ok-up Ta	bles and P	Processing Coefficient Tables	22
8 Int	ermediat	e Products	(IPs)	23
Appendi	ix A.	Data Mn	emonic to Interface Mapping	24
Appendi	ix B.	Commor	RDR Static Header Values	27
Appendi	ix C.	DQTT Q	uality Flag Mapping	28
Appendi	ix D.	Abbrevia	ations and Acronyms	29
Attachm	ent A.	XML Fo	rmats for Related Products	30
			List of Figures	
Figure:	3.1-1 S	cience and	Diagnostic RDR Generalized UML Diagram	5
_			p, Telemetry, and Spacecraft Diary (when requested separately)	
		_		
_	-	-	Ephemeris and Attitude Delivery Timeline DR Layout	
			F5 File Model	
115010.		110111101	5 1 1.0 1.10 001	10
			List of Tables	
Table: /	1 1 1 Ca	mmon DF	ND Cturretumes	0
			OR Structurespacecraft Telemetry RDR Application Packets	
			pacecraft Telemetry RDR Structure	
			cecraft Ephemeris and Attitude Application Packets	
			R Spacecraft Attitude and Ephemeris RDR Structure	
			pacecraft Telemetry RDR Data Content Summary	
			pacecraft Telemetry RDR Structure RDR Spacecraft Ephemeris and Attitude Application Packets	
rault. 4	+.ン.∠.∠-1	11 22-1 K	DA Spacecian Ephemens and Auntude Application rackets	13

JPSS Alg Spec for Geolocation & S/C Orient - Vol II, Block $2.0.0\,$

474-00448-02-08-B0200 Effective Date: October 23, 2014

Block/Revision 0200A1

Table:	4.3.2.2-2	JPSS-1 Spacecraft Attitude and Ephemeris RDR Structure	15
Table:	4.4.1.2-1	JPSS-2 Spacecraft Telemetry RDR Application Packets (TBD3)	17
Table:	4.4.2.2-1	JPSS-2 RDR Spacecraft Ephemeris and Attitude Application Packets (TBR)	17
Table:	4.5.1.2-1	GCOM-W1 Spacecraft Telemetry RDR Application Packets	18
Table:	4.5.1.2-2	GCOM-W1 Spacecraft Telemetry RDR Structure	18
Table:	4.5.2.2-1	GCOM-W1 Spacecraft Attitude and Ephemeris RDR Application Packets	19
Table:	4.5.2.2-2	GCOM-W1 Spacecraft Attitude and Ephemeris RDR Structure	19
Table:	B-1 Com	mon RDR Static Header Values lists pre-defined unique values for the fields	
from th	e static he	ader for each of the RDRs defined	27
Table:	ATT-1 X	ML Formats for Related Products	30

1 Introduction

1.1 Scope

The Joint Polar Satellite System (JPSS) Algorithm Specification Volume II: Data Dictionary for the Geolocation and Spacecraft Orientation. This specification includes the format of the Hierarchical Data Format Release 5 (HDF5) files, as well as the product definitions. These formats are available to external users of the JPSS. For an overview of the data product formats, see 474-0001-01, JPSS CDFCB-X Vol I. For an overview of the metadata formats for data products, see 474-00448-02-01-B0200, JPSS Algorithm Specification Volume II: Data Dictionary for the Common Algorithms.

1.2 Purpose

1.3 Organization

Section	Contents
Section 1	Provides information regarding the scope, purpose, and organization of this
	document, as reference material only.
Section 2	Lists parent documents and related documents that were used as sources of
	information for this document or that provide additional background
	information to aid understanding of the interface implementations.
Section 3	Provides an overview of the HDF5 UML for the data product types
Section 4	Provides a description of the contents of each JPSS Intermediate Product
	associated with this algorithm grouping.
Section 5	Provides a description of the contents of each JPSS EDR associated with this
	algorithm grouping.
Section 6	Provides a description of the Ancillary and Auxiliary Data Inputs if applicable.
Section 7	Provides a description of relevant Look-Up Tables (LUTs) and Processing
	Coefficient Tables (PCTs) associated with this algorithm grouping.
Appendix A	Provides the Data Mnemonic to Interface Mapping for the data products in this
	volume.
Appendix B	Provides the maps the quality flags by sensor and product that are reportable to
	the associated data product quality flag Test ID used in the processing
	environment
Appendix C	Reference 470-00041, JPSS Program Lexicon
Attachment A	Provides the list of applicable xml files for this Data Dictionary.

2 Related Documentation

The latest JPSS documents can be obtained from URL:

https://jpssmis.gsfc.nasa.gov/frontmenu_dsp.cfm. JPSS Project documents have a document number starting with 470, 472 or 474 indicating the governing Configuration Control Board (CCB) (Program, Flight, or Ground) that has the control authority of the document.

2.1 Parent Documents

The following reference document(s) is (are) the Parent Document(s) from which this document has been derived. Any modification to a Parent Document will be reviewed to identify the impact upon this document. In the event of a conflict between a Parent Document and the content of this document, the JPSS Program Configuration Change Board has the final authority for conflict resolution.

Document Number	Title	
470-00067	Joint Polar Satellite System (JPSS) Ground System Requirements Document	
	(GSRD)	
470-00067-02	Joint Polar Satellite System (JPSS) Ground System Requirements Document	
	(GSRD), Volume 2 – Science Product Specifications	
474-00448-01	Joint Polar Satellite System (JPSS) Algorithm Specification for the Common	
	Algorithm Software Requirements Specification (SRS)	

2.2 Applicable Documents

The following document(s) is (are) the Applicable Document(s) from which this document has been derived. Any modification to an Applicable Document will be reviewed to identify the impact upon this document. In the event of conflict between an Applicable Document and the content of this document, the JPSS Program Configuration Change Board has the final authority for conflict resolution.

Document Number	Title
NPR 7150.2A	NASA Software Engineering Requirements
474-00167	Joint Polar Satellite System (JPSS) Common Ground System (CGS)
	Requirements Document
474-00005	Joint Polar Satellite System (JPSS) Government Resource for Algorithm
	Verification, Independent Testing, and Evaluation (GRAVITE) Requirements
	Document
474-00200	Joint Polar Satellite System (JPSS) Common Ground System (CGS) to
	Government Resource for Algorithm Verification, Independent Testing, and
	Evaluation (GRAVITE) Interface Requirements Document (IRD)
N/A	Hierarchical Data Format, Version 5 (HDF5), http://www.hdfgroup.org/HDF5/

2.3 Information Documents

The following documents are referenced herein and, amplify or clarify the information presented in this document. These documents are not binding on the content of this document.

Document Number	Title
474-00053	Joint Polar Satellite System (JPSS) VIIRS Geolocation Algorithm Theoretical

Document Number	Title
	Basis Document (ATBD)
474-00448-03-08	Joint Polar Satellite System (JPSS) Algorithm Specification Volume III:
	Operational Algorithm Description (OAD) for the Geolocation and Spacecraft
	Orientation
474-00333	Joint Polar Satellite System (JPSS) Ground System (GS) Architecture
	Description Document (ADD)
474-00054	Joint Polar Satellite System (JPSS) Ground System (GS) Concept of Operations
	(ConOps)
470-00041	Joint Polar Satellite System (JPSS) Program Lexicon
474-00001-01	Joint Polar Satellite System (JPSS) Common Data Format Control Book, Vol I –
	Overview
474-00448-02-01-	Joint Polar Satellite System (JPSS) Algorithm Specification Volume II: Data
B0200	Dictionary for the Common Algorithms
474-00303	Joint Polar Satellite System (JPSS) Ground System to NESDIS Environmental
	Science Processing Center (ESPC) Interface Requirements Document (IRD)
GSFC 429-05-02-42	Joint Polar Satellite System (JPSS) Mission Data Format Control Book
	(MDFCB) -NPP
472-00251	Joint Polar Satellite System (JPSS) Mission Data Format Control Book
	(MDFCB) - JPSS-1

3 UML for HDF5 Products

The following paragraphs describe the structure and contents of the RDR granules formed by the JPSS ground processing software. The ground processing software generates several RDRs for each sensor by accumulating one or more specific APs into a single collection. The accumulated Application Packets (APs) are not byte-aligned or otherwise altered. They are merely collected and placed into storage in the order that they are received. The following paragraphs describe the binary packaging structure for these accumulated APs. Table 3-1, Common RDR Structure, shows the common JPSS RDR Structure. All JPSS RDRs are based on the same generic granule storage framework and is illustrated conceptually in Figure 3-1 Common RDR Layout.

3.1 RDR HDF5 Details

Figure 3.1-1, Science and Diagnostic RDR Generalized UML Diagram, depicts the HDF5 RDR file organization as a Unified Modeling Language (UML) class diagram for Science and Diagnostic RDRs. This also describes the science calibration RDRs generated by OMPS. Figure 3.1-2, Dwell, Dump, and Telemetry RDR Generalized UML Diagram, depicts the HDF5 RDR file organization as a UML Class Diagram for Dwell, Dump and Telemetry RDRs.

Each HDF5 RDR file contains an HDF5 Root Group, '/', a Data_Products Group, one or more Product Groups (CollectionShortName), and an All_Data Group containing one or more (CollectionShortName)_All groups. The latter group contains the Dataset_Array which holds the common RDR structures of Consultative Committee for Space Data Systems (CCSDS) structured APs. For Science and Diagnostic RDRs a Spacecraft Diary Group is also included in the Data_Products group. The Product Groups and Spacecraft Diary Group both contain datasets – an Aggregation Dataset (CollectionShortName_Aggr) and Granule Datasets (CollectionShortName_Gran_n – where n indicates the nth granule in a temporal aggregation of granules (1 .. n)). A granule is a general term used to describe the minimum quanta of data collected per processing period, generally on the order of tens of seconds. For the definition and organization of the metadata attributes contained in the HDF5 files, see the JPSS CDFCB-X Vol. V – Metadata. Attributes that are specific to a particular RDR are listed with the specific RDR's data format definition. Note: In the UML diagrams, an '* following the name of an attribute indicates an element with exceptions; see the JPSSAlgorithm Specification Volume II: Data Dictionary for the Common Algorithms, for the details of the exception.

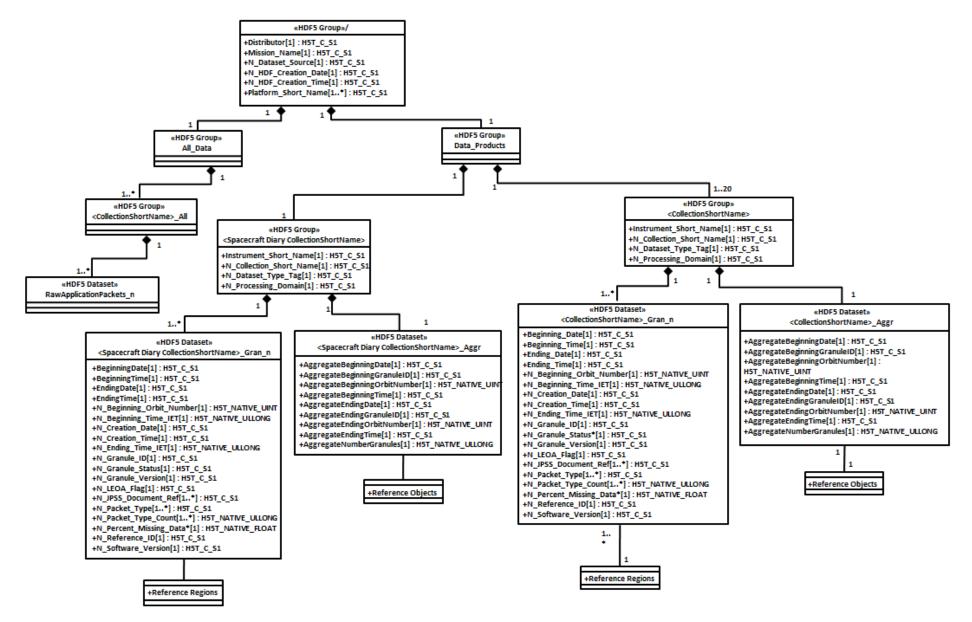


Figure: 3.1-1 Science and Diagnostic RDR Generalized UML Diagram

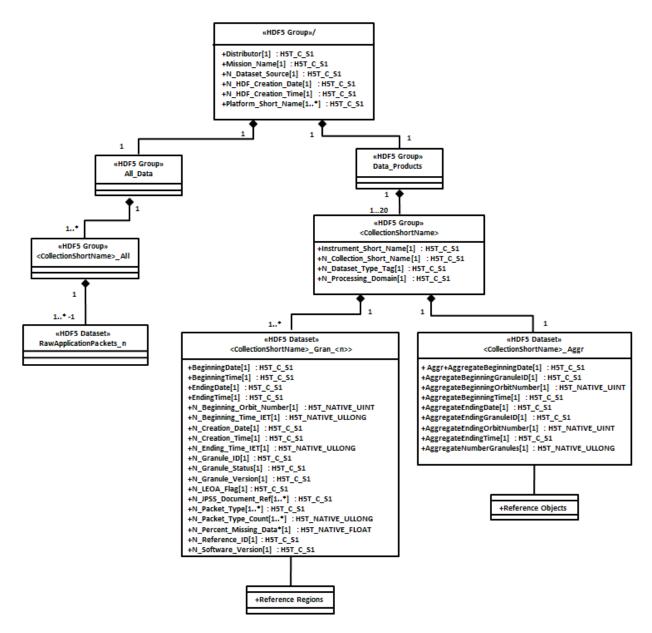


Figure: 3.1-2 Dwell, Dump, Telemetry, and Spacecraft Diary (when requested separately) RDR Generalized UML Diagram

3.2 RDR Spacecraft Ephemeris and Attitude Data

Figure 3.2-1, Science and Diagnostic HDF5 RDR files contain Spacecraft Ephemeris and Attitude application packets (AP) that occur for the same period of time as the requested datasets included in the file. This data is contained in the Spacecraft Diary Group (CollectionShortName) of the HDF5 file.

The period of the Spacecraft Ephemeris and Attitude granules is not likely to coincide with the period of the RDR product dataset granules. However, the aggregation of Spacecraft Ephemeris and Attitude granules contains all of the APs collected during the aggregation period of the RDR

product dataset. If the collection frequency for a given RDR product granule is less than the collection frequency for the Spacecraft Ephemeris and Attitude granule, then the co-temporal Spacecraft Ephemeris and Attitude granules are included in the HDF5 file in order to ensure overlapping time coverage. The time span of Ephemeris and Attitude granules is always greater than or equal to the time span of the RDR data. For example, Figure 3.1-1, Spacecraft Ephemeris and Attitude Delivery Timeline, shows a general example where a sensor granule timespan is much greater than the associated Spacecraft Ephemeris and Attitude granules. In this example, if Sensor granule *X* was requested for delivery, the resulting HDF5 file would include Spacecraft Ephemeris and Attitude granules *a*, *b*, *c*, and *d*. Likewise, Sensor granule *Y* would be accompanied by Spacecraft Ephemeris and Attitude granules *d*, *e*, *f*, and *g*.

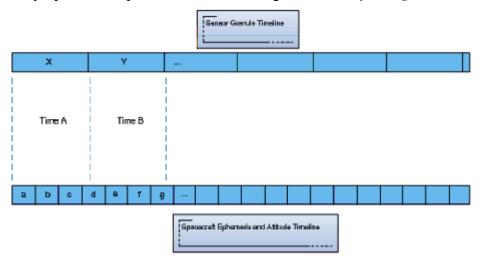


Figure: 3.2-1 Spacecraft Ephemeris and Attitude Delivery Timeline

4 JPSS Raw Data Records (RDRs)

The following paragraphs describe the structure and contents of the RDR granules formed by the JPSS ground processing software. The ground processing software generates several RDRs for each sensor by accumulating one or more specific APs into a single collection. The accumulated APs are not byte-aligned or otherwise altered. They are merely collected and placed into storage in the order that they are received. The following paragraphs describe the binary packaging structure for these accumulated APs. Table 4.1-1, Common RDR Structure, shows the common JPSS RDR Structure. All JPSS RDRs are based on the same generic granule storage framework and is illustrated conceptually in Figure 4.1-1 Common RDR Layout.

The detailed structure and contents of the APs are documented in the Mission Data Format Control Book (MDFCB) for each mission, GSFC 429-05-02-42 for S-NPP, 472-00251 for JPSS-1, and 472-TBD2 for JPSS-2. For more information on AP formatting, see the Recommendations for Advanced Orbiting Systems, Networks and Data Links, CCSDS 701.0-B-2, Section 3.3.3.

Note: All multi-byte structures are in Big Endian.

4.1 Common RDR Structures

Table: 4.1-1 Common RDR Structures

Field Name	Description
Static Header	Static header describing the RDR
APID List	Array of structures that contain information about each APID that is collected in the RDR
Packet Tracker	Array of structures that contains information about each AP that is in the RDR
AP Storage Area	General buffer where the APs are stored back-to-back in the order that they are received

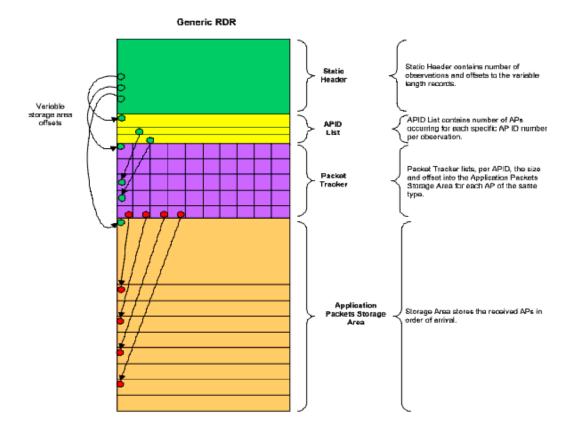


Figure: 4.1-1 Common RDR Layout

4.1.1 Geolocation and Spacecraft Orientation RDR Overview

The JPSS-1 RDR is an accumulation of binary data generated by sensors on board the S-NPP and JPSS-1 spacecraft and assembled into groups called application packets (APs). Unique Application Packet Identifier (APID) numbers represent each discrete AP type. The JPSS-1 ground software collects one or more groups of related APs together into granules which are then assembled into common RDR structures and combined with metadata to create the delivered HDF5 file. The APs are accumulated per discrete period and a granule refers to the data accumulated and organized for that discrete period. The APs are logically grouped into science, diagnostic, dwell, dump, and telemetry RDRs. A science RDR data product generally contains all the necessary APs to construct a Science Data Record (SDR). Diagnostic, dwell, and dump RDRs generally contain APs that are only generated while the sensor is in diagnostic mode. Telemetry RDRs generally contain APs that describe the health and status of the sensor or spacecraft. This document shows the structure of the collection of APs that compose individual RDRs and the HDF5 structure for RDRs. Figure 4.1.1-1, RDR HDF5 File Model, shows the reference hierarchy for RDR contents.

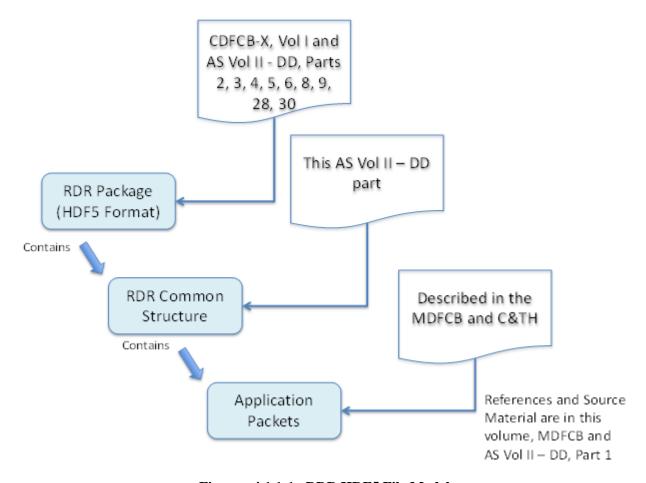


Figure: 4.1.1-1 RDR HDF5 File Model

4.2S-NPP Spacecraft RDRs

Data Mnemonic	Telemetry: RDRE-SCTP-C0031
	Attitude/Ephemeris: RDRE-SCAE-C0030
Description/	The S-NPP Spacecraft produces several application packets on VCID 0 which are
Purpose	related to spacecraft health and status. These Application packets are grouped into
	the S-NPP Spacecraft Telemetry RDR.
	The S-NPP Spacecraft produces several application packets on VCID 0 which are
	related to spacecraft attitude and ephemeris. These Application packets are grouped
	into the S-NPP Attitude and Ephemeris RDR.
File-Naming	See the JPSS CDFCB-X Vol. I, Section 3.0 for details
Construct	
File Size	Telemetry: Maximum 4700.51KiB (608 seconds).
	Attitude/Ephemeris: Nominal 14.62 KiB (20 seconds).
	All sizes are per granule, with duration specified in (). Sizes do not include HDF5
	overhead.
File Format Type	HDF5
Data Content and	Section 4.2.1 describes the S-NPP Spacecraft Telemetry RDR
Data Format	Section 4.2.2 describes the S-NPP Attitude/Ephemeris RDR

4.2.1 S-NPP Spacecraft Telemetry RDR

4.2.1.1 S-NPP Spacecraft Telemetry RDR HDF5 Files

The S-NPP Spacecraft Telemetry RDR HDF5 files are described in Section 3.0, Raw Data Records HDF5 Details.

4.2.1.2 S-NPP Spacecraft Telemetry RDR Data Content Summary

Table 4.2.1.2-1, S-NPP Spacecraft Telemetry RDR Application Packets, lists the APs accumulated for the S-NPP Spacecraft Telemetry RDR. In the event of a discrepancy in APIDs listed here, see the S-NPP C&TH, BATC Drawing 568423. Note: Spacecraft generated APIDs are in the range 0 to 99, however, only the APIDs that are currently described in the C&TH are included here. Additional APIDs may be added with subsequent revisions of the S-NPP C&TH.

Table: 4.2.1.2-1 S-NPP Spacecraft Telemetry RDR Application Packets

APID Short Name	Description	Value S-NPP APID ₁₀
BUS_HR	Bus High Rate, 1 Hz	1
BUS_LR	Bus Low Rate, 1/16 Hz	2
BUS_DTU	Bus DTU	3
BUS_T	Bus Thermal	4
SSR	SSR 1553 Data	5
PUMA	PUMA 1553 Data	6
DSEP	DSEP 1553 Data – no Therm	7
ADCS_HKL	ADCS HSK – low rate	9
TOD	Time of Day Message	10
ADCS_DIA	ADCS Diagnostic	12
FSW_HKF	Bus FSW HSK – Fast	13
FSW_HKS	Bus FSW HSK – Slow	14
ST_HR	High Rate Star Tracker	16
FSW_DIA	FSW Diagnostic, #1	17
FSW_DIA2	FSW Diagnostic, #2	18
FW_DIA	1394 Diagnostic	19
ADCSDIAF	ADCS Diagnostic, Fast	20
ADCSDIAS	ADCS Diagnostic, Slow	21
FSW_DIA3	FSW Diagnostic	22
FSW_DIA4	FSW Diagnostic	23
FSW_DIA5	FSW Diagnostic	24
PD_LR	PUMA and DSEP, Low Rate	25
DMP_SCCS	SCC FSW Short Table Dump	26
SMP_CDPS	CDP FSW Short Table Dump	27
DUMP_SCC	SCC Table Dump Packet	28
DUMP_CDP	CDP Table Dump Packet	29
SCC_SU	SCC FSW Startup & Kernel Frames	30
DTU_TEST	DTU Test Mode	31
FW_HK	1394 Housekeeping	70

474-00448-02-08-B0200 Effective Date: October 23, 2014

Block/Revision 0200A1

Table 4.2.1.2-2, S-NPP Spacecraft Telemetry RDR Structure, shows the layout and static contents of the S-NPP Spacecraft Telemetry RDR.

Table: 4.2.1.2-2 S-NPP Spacecraft Telemetry RDR Structure

	Byte	Field	Туре	Value
Static Header	0	satellite	char[4]	'NPP'
	4	sensor	char[16]	'SPACECRAFT'
	20	typeID	char[16]	'TELEMETRY'
	36	numAPIDs	Uint32	29
	40	apidListOffset	Uint32	72
	44	pktTrackerOffset	Uint32	1000
	48	apStorageOffset	Uint32	424864
	52	nextPktPos	Uint32	varies
	56	startBoundary	int64	varies
	64	endBoundary	int64	varies
Dynamic	72	APID List	IngSmdCommon_ApidDetailTyp e[29]	varies
	1000	Pkt Tracker List	IngSmdCommon_PktTrackerTyp e[17661]	varies
	424864	AP storage area	Uint8[4388454]	varies
		Total Size	4,813,318 Bytes	

4.2.2 S-NPP Spacecraft Attitude and Ephemeris RDR

4.2.2.1 S-NPP Spacecraft Attitude and Ephemeris RDR HDF5 Files

The S-NPP Spacecraft Attitude and Ephemeris RDR HDF5 files are described in Section 3.0, Raw Data Records HDF5 Details.

4.2.2.2 S-NPP Spacecraft Attitude and Ephemeris Data Content Summary

Table 4.2.3-1, S-NPP RDR Spacecraft Ephemeris and Attitude Application Packets, lists the APs accumulated for the Spacecraft Diary group; the APID assignment listed in this table applies only to S-NPP. In the event of a discrepancy in the APIDs listed here, see the S-NPP C&TH, BATC Drawing 568423.

4.2.3 S-NPP RDR Spacecraft Ephemeris and Attitude Application Packets

Table: 4.2.3-1 S-NPP Spacecraft Ephemeris and Attitude Application Packets

APID Short Name	APID Description	Value S-NPP APID ₁₀
CRITICAL	Bus Critical Telemetry	0
ADCS_HKH	ADCS Housekeeping Telemetry High Rate	8
DIARY	Diary (Ephemeris and Attitude)	11

The sampling frequencies of the S-NPP attitude and ephemeris data contained in the Spacecraft Attitude and Ephemeris granules are both 1.0 Hz. For more information, see SER-SW062, FSW Table Description, CDP Table 20.

Table 4.2.3-2, S-NPP Spacecraft Attitude and Ephemeris RDR Structure, shows the layout and static contents of the S-NPP Spacecraft Attitude and Ephemeris RDR.

Table: 4.2.3-2 S-NPP RDR Spacecraft Attitude and Ephemeris RDR Structure

	Byte	Field	Туре	Value
Static Header	0	satellite	char[4]	'NPP'
	4	sensor	char[16]	'SPACECRAFT'
	20	typeID	char[16]	'DIARY'
	36	numAPIDs	Uint32	3
	40	apidListOffset	Uint32	72
	44	pktTrackerOffset	Uint32	168
	48	apStorageOffset	Uint32	1680
	52	nextPktPos	Uint32	varies
	56	startBoundary	int64	varies
	64	endBoundary	int64	varies
Dynamic	72	APID List	IngSmdCommon_ApidDetailType [3]	varies
	168	Pkt Tracker List	IngSmdCommon_PktTrackerType [63]	varies
	1440	AP storage area	Uint8[13293]	varies
		Total Size	14,973 Bytes	

4.3 JPSS-1 Spacecraft RDRs

Data Mnemonic	Telemetry: RDRE-SCTN-C0031
	Attitude/Ephemeris: RDRE-SCAE-C0031
Description/	The JPSS-1 Spacecraft produce several application packets which are related to
Purpose	spacecraft health and status. These Application packets are grouped into the JPSS-1
	Spacecraft Telemetry RDR.
	The JPSS-1 Spacecraft produces several application packets which are related to
	attitude and ephemeris. These Application packets are grouped into the JPSS-1
	Attitude and Ephemeris RDR.
File-Naming	See the JPSS CDFCB-X Vol. I, Section 3.0 for details
Construct	
File Size	Telemetry: Maximum 4700.51KiB (608 seconds). (TBR)Attitude/Ephemeris:
	Nominal 14.62 KiB (20 seconds). (TBR)
	All sizes are per granule, with duration specified in (). Sizes do not include HDF5
	overhead.
File Format Type	HDF5
Data Content and	Section 4.3.1 describes the JPSS-1 Spacecraft Telemetry RDR
Data Format	Section 4.3.2 describes the JPSS-1 Attitude/Ephemeris RDR

4.3.1 JPSS-1 Spacecraft Telemetry RDR

4.3.1.1 JPSS-1 Spacecraft Telemetry RDR HDF5 Files

The JPSS-1 Spacecraft Telemetry RDR HDF5 files are described in Section 3.0, Raw Data Records HDF5 Details.

4.3.1.2 JPSS-1 Spacecraft Telemetry RDR Data Content Summary

Table 4.3.1.2-1, JPSS-1 Spacecraft Telemetry RDR Data Content Summary, lists the APs accumulated for the JPSS-1 Spacecraft Telemetry RDR. The APID assignment listed in Table 4.3.1.2-1, JPSS-1 Spacecraft Telemetry RDR Application Packets, applies to JPSS-1 only. In the event of a discrepancy in APIDs listed here, see the JPSS Mission Data Format Control Book (MDFCB) - JPSS-1 (474-00251).

Table: 4.3.1.2-1 JPSS-1 Spacecraft Telemetry RDR Data Content Summary

APID Short Name	Description	Value APID ₁₀
BUS_HR	Bus High Rate, 1 Hz	1
BUS_LR	Bus Low Rate, 1/16 Hz	2
BUS_DTU	Bus DTU	3
BUS_T	Bus Thermal	4
SSR	SSR Data	5
PCDU1	PCDU 1 Data (TBR)	6
PCDU2	PCDU 2 Data (TBR)	7
ADCS_HKL	ADCS HSK – low rate	9
TOD	Time of Day Message	10
ADCS_DIA	ADCS Diagnostic	12
FSW_HKF	Bus FSW HSK – Fast	13
FSW_HKS	Bus FSW HSK – Slow	14
ST_HR	High Rate Star Tracker	16
FSW_DIA	FSW Diagnostic, #1	17
FSW_DIA2	FSW Diagnostic, #2	18
SW_DIA	SpaceWire Diagnostic	19
ADCSDIAF	ADCS Diagnostic, Fast	20
ADCSDIAS	ADCS Diagnostic, Slow	21
FSW_DIA3	FSW Diagnostic	22
FSW_DIA4	FSW Diagnostic	23
FSW_DIA5	FSW Diagnostic	24
GSE_LR	GSE 1, Low Rate (TBR)	25
DMP_SCPS	SCP FSW Short Table Dump	26
SMP_CDPS	CDP FSW Short Table Dump	27
DUMP_SCP	SCP Table Dump Packet	28
DUMP_CDP	CDP Table Dump Packet	29
SCP_SU	SCP FSW Startup & Kernel Frames	30
DTU_TEST	DTU Test Mode	31
CDP_SU	CDP FSW Startup	40

APID Short Name	Description	Value APID ₁₀
GYRO_HR	Gyro – High Rate	65
SW_HK	SpaceWire Housekeeping	70

Table: 4.3.1.2-2 JPSS-1 Spacecraft Telemetry RDR Structure

	Byte	Field	Туре	Value
Static Header	0	satellite	char[4]	'J01'
	4	sensor	char[16]	'SPACECRAFT'
	20	typeID	char[16]	'TELEMETRY'
	36	numAPIDs	Uint32	29
	40	apidListOffset	Uint32	72
		pktTrackerOffset	Uint32	1000
	48	apStorageOffset	Uint32	424864
	52	nextPktPos	Uint32	varies
	56	startBoundary	int64	varies
	64	endBoundary	int64	varies
Dynamic	72	APID List	IngSmdCommon_ApidDetailTyp e[29]	varies
	1000	Pkt Tracker List	IngSmdCommon_PktTrackerTyp e[17661]	varies
	424864	AP storage area	Uint8[4388454]	varies
		Total Size	4,813,318 Bytes	

4.3.2 JPSS-1 Spacecraft Attitude and Ephemeris RDR

4.3.2.1 JPSS-1 Spacecraft Attitude and Ephemeris RDR HDF5 Files

The JPSS-1 Spacecraft Attitude and Ephemeris RDR HDF5 files are described in Section 3.0, Raw Data Records HDF5 Details.

4.3.2.2 JPSS-1 Spacecraft Attitude and Ephemeris Data Content Summary

Table 4.3.2.2-1, JPSS-1 RDR Spacecraft Ephemeris and Attitude Application Packets, lists the APs accumulated for the Spacecraft Diary group for JPSS-1. In the event of a discrepancy see the JPSS-1 MDFCB, 472-00251.

Table: 4.3.2.2-1 JPSS-1 RDR Spacecraft Ephemeris and Attitude Application Packets

APID Short Name	APID Description	Value JPSS-1 APID ₁₀
CRITICAL	Bus Critical Telemetry	0
ADCS_HKH	ADCS Housekeeping Telemetry High Rate	8
DIARY	Diary (Ephemeris and Attitude)	11

The Spacecraft Ephemeris data points within the granule are sampled at 0.1 Hz and the Attitude data points are sampled at 2 Hz; refer to the JPSS MDFCB, 472-00251, for further details.

Table: 4.3.2.2-2 JPSS-1 Spacecraft Attitude and Ephemeris RDR Structure

	Byte	Field	Туре	Value
Static Header	0	satellite	char[4]	'J01'
	4	sensor	char[16]	'SPACECRAFT'
	20	typeID	char[16]	'DIARY'
	36	numAPIDs	Uint32	3
	40	apidListOffset	Uint32	72
	44	pktTrackerOffset	Uint32	168
	48	apStorageOffset	Uint32	1680
	52	nextPktPos	Uint32	varies
	56	startBoundary	int64	varies
	64	endBoundary	int64	varies
Dynamic	72	APID List	IngSmdCommon_ApidDetailType [3]	varies
	168	Pkt Tracker List	IngSmdCommon_PktTrackerType [63]	varies
	1440	AP storage area	Uint8[13293]	varies
		Total Size	14,973 Bytes	

4.4 JPSS-2 Spacecraft RDRs

Data Mnemonic	Telemetry: RDRE-SCTN-C0032					
	Attitude and Ephemeris: RDRE-SCAE-C0032					
Description/	The JPSS-2 Spacecraft produce several application packets which are related					
Purpose	to spacecraft health and status. These Application packets are grouped into the					
	JPSS-2 Spacecraft Telemetry RDR.					
	The JPSS-2 Spacecraft produces several application packets which are related					
	to attitude and ephemeris. These Application packets are grouped into the					
	JPSS-2 Attitude and Ephemeris RDR.					
File-Naming Construct	See the JPSS CDFCB-X Vol. I, Section 3.0 for details.					
File Size	Telemetry: TBD-1					
	Attitude/Ephemeris: TBD-2					
File Format Type	HDF5					
Data Content and Data	See Section 4.4.1 JPSS-2 Spacecraft Telemetry RDR					
Format	See Section 4.4.2 PSS-2 Spacecraft Attitude and Ephemeris RDR					

4.4.1 JPSS-2 Spacecraft Telemetry RDR

4.4.1.1 JPSS-2 Spacecraft Telemetry RDR HDF5 Files

The JPSS-2 Spacecraft Telemetry RDR HDF5 files are described in Section 3.0, Raw Data Records HDF5 Details.

4.4.1.2 JPSS-2 Spacecraft Telemetry RDR Data Content Summary

Table 4.4.1.2-1, JPSS-2 Spacecraft Telemetry RDR Application Packets, lists the APs accumulated for the JPSS-2 Spacecraft Telemetry RDR. The APID assignment listed in Table

4.4.1.2-1, JPSS-2 Spacecraft Telemetry RDR Application Packets, applies to JPSS-2 only. In the event of a discrepancy in APIDs listed here, see the JPSS-2 MDFCB, 472-00TBD.

Table: 4.4.1.2-1 JPSS-2 Spacecraft Telemetry RDR Application Packets (TBD3)

APID Short Name	Description	Value APID ₁₀

4.4.2 JPSS-2 Spacecraft Attitude and Ephemeris RDR

4.4.2.1 JPSS-2 Spacecraft Attitude and Ephemeris RDR HDF5 Files

The JPSS-2 Spacecraft Attitude and Ephemeris RDR HDF5 files are described in Section 3.0, Raw Data Records HDF5 Details.

4.4.2.2 JPSS-2 Spacecraft Attitude and Ephemeris Data Content Summary

Table 4.4.2.2-1, JPSS-2 RDR Spacecraft Ephemeris and Attitude Application Packets, lists the APs accumulated for the Spacecraft Diary group for JPSS-2. In the event of a discrepancy see the JPSS-2 MDFCB, 472-00TBD.

Table: 4.4.2.2-1 JPSS-2 RDR Spacecraft Ephemeris and Attitude Application Packets (TBR)

APID Short Name	APID Description	Value APID ₁₀
CRITICAL	Bus Critical Telemetry	200
DIARY	SCP Auxiliary Data (attitude and ephemeris)	208
SCAUX	DSU Auxiliary Data (table indicators and compression ratio)	211

The Spacecraft Ephemeris data points within the granule are sampled at 0.1 Hz and the Attitude data points are sampled at 2 Hz; refer to the JPSS-2 MDFCB, 472-00TBD, for further details.

4.5 GCOM-W1 Spacecraft RDRs

Data Mnemonic	Telemetry: RDRE-SCGW-C0031					
(JPSS-1 Only)	Attitude and Ephemeris: RDRE-SCGW-C0032					
Description/	The GCOM-W1 Spacecraft produces application packets related to spacecraft					
Purpose	health and status. These Application packets are grouped into the GCOM-W1					
	Spacecraft Telemetry RDR.					
	The GCOM-W1 Spacecraft produces application packets related to spacecraft					
	attitude and ephemeris. These Application packets are grouped into the GCOM-W1					
	Attitude and Ephemeris RDR					
File-Naming	See the JPSS CDFCB-X Vol. I, Section 3.0 for details.					
Construct						
File Size	Telemetry: Maximum 431.24 KiB (540 Seconds)					
	Attitude & Ephemeris: Nominal 11.09 KiB (20 Seconds)					
File Format Type	HDF5					
Data Content and	Section 4.5.1 describes the GCOM-W1 Spacecraft Telemetry RDR					
Data Format	Section 4.5.2 describes the GCOM-W1 Spacecraft Attitude and Ephemeris RDR					

4.5.1 GCOM-W1 Spacecraft Telemetry RDR

4.5.1.1 GCOM-W1 Spacecraft Telemetry RDR HDF5 Files

The GCOM-W1 Spacecraft Telemetry RDR HDF5 files are described in Section 3.0, Raw Data Records HDF5 Details.

4.5.1.2 GCOM-W1 Spacecraft Telemetry RDR Data Content Summary

Table 4.5.1.2-1, GCOM-W1 Spacecraft Telemetry RDR Application Packets, lists the APs accumulated for the GCOM-W1 Spacecraft Telemetry RDR. The APID assignment listed in Table 4.5.1.2-1, GCOM-W1 Spacecraft Telemetry RDR Application Packets, applies to GCOM-W only. In the event of a discrepancy in APIDs listed here or for details of the AP content, see the GCOM-W1 Mission Operations Interface Specification (MOIS), 474-REF-00145 (JAXA #: SGC-070078) and the JPSS GS Technical Exchange with JAXA for GCOM-W1, 474-REF-00111.

Table: 4.5.1.2-1 GCOM-W1 Spacecraft Telemetry RDR Application Packets

APID Short Name	Description	Value APID ₁₀
SYS_TELEMETRY	Housekeeping Telemetry	1281
RT_PCD_SUPP	Support Data	1550

Table 4.5.1.2-2, GCOM-W1 Spacecraft Telemetry RDR Structure, shows the layout and static contents of the GCOM-W1 Spacecraft Telemetry RDR.

Table: 4.5.1.2-2 GCOM-W1 Spacecraft Telemetry RDR Structure

	Byte	Field	Туре	Value
Static Header	0	Satellite	char[4]	'GW1'
	4	Sensor	char[16]	'SPACECRAFT'
	20	typeID	char[16]	'TELEMETRY'
	36	numAPIDs	Uint32	2
	40	apidListOffset	Uint32	72
	44	pktTrackerOffset	Uint32	136
	48	apStorageOffset	Uint32	26104
	52	nextPktPos	Uint32	varies
	56	startBoundary	int64	varies
	64	endBoundary	int64	varies
Dynamic	72	APID List	IngSmdCommon_ApidDetailTyp e[2]	varies
	136	Pkt Tracker List	IngSmdCommon_PktTrackerTyp e[1082]	varies
	26104	AP storage area	Uint8[415488]	varies
		Total Size	441592 Bytes	

4.5.2 GCOM-W1 Spacecraft Attitude and Ephemeris RDR

4.5.2.1 GCOM-W1 Spacecraft Attitude and Ephemeris RDR HDF5 Files

The GCOM-W1 Spacecraft Attitude and Ephemeris RDR HDF5 files are described in Section 3.0, Raw Data Records HDF5 Details.

4.5.2.2 GCOM-W1 Spacecraft Attitude and Ephemeris RDR Data Content Summary

Table 4.5.2.2-1, GCOM-W1 Spacecraft Attitude and Ephemeris RDR Application Packets, lists the APs accumulated for the GCOM-W1 Spacecraft Attitude and Ephemeris RDR. The APID assignment listed in Table 4.5.2.2-1, GCOM-W1 Spacecraft Attitude and Ephemeris RDR Application Packets, applies to GCOM-W only. In the event of a discrepancy in APIDs listed here or for details of the AP content, see the GCOM-W1 Mission Operations Interface Specification (MOIS), 474-REF-00145 (JAXA #: SGC-070078) and the JPSS GS Technical Exchange with JAXA for GCOM-W1, 474-REF-00111. In addition, for details about GPS data refer to the Global Positioning System Wing Systems Engineering & Integration Interface Specification, IS-GPS-200.

Table: 4.5.2.2-1 GCOM-W1 Spacecraft Attitude and Ephemeris RDR Application Packets

APID Short Name	Description	Value APID ₁₀
ATT_ORBIT	Orbit Data (Spacecraft Diary)	1549

Table 4.5.2.2-2, GCOM-W1 Spacecraft Attitude and Ephemeris RDR Structure, shows the layout and static contents of the GCOM-W1 Spacecraft Attitude and Ephemeris RDR.

Table: 4.5,2.2-2 GCOM-W1 Spacecraft Attitude and Ephemeris RDR Structure

	Byte	Field	Type	Value
Static Header	0	satellite	char[4]	'GW1'
	4	sensor	char[16]	'SPACECRAFT'
	20	typeID	char[16]	'DIARY'
	36	numAPIDs	Uint32	1
	40	apidListOffset	Uint32	72
	44	pktTrackerOffset	Uint32	104
	48	apStorageOffset	Uint32	608
	52	nextPktPos	Uint32	varies
	56	startBoundary	int64	varies
	64	endBoundary	int64	varies
Dynamic	72	APID List	IngSmdCommon_ApidDetailTyp e[1]	varies
	104	Pkt Tracker List	IngSmdCommon_PktTrackerTyp e[21]	varies
	608	AP storage area	Uint8[10752]	varies
		Total Size	11,360 Bytes	

5 Temperature Data Records (TDRs)

6 Sensor Data Records (SDRs)

7 Look-up Tables and Processing Coefficient Tables

8 Intermediate Products (IPs)

Appendix A. Data Mnemonic to Interface Mapping

Description	Data	File Type	Document	Interface Mnemonic
S-NPP Spacecraft - Attitude and Ephemeris	RDRE-SCAE-C0030	HDF5		
Attitude and Epitemens			474-00410-B0200: JPSS CGS to CLASS ICD	X_CG_AD-L00030
			IC60917-SEIT-001: JPSS C3S to IDPS ICD	T NE MM-L00090
			474-00412-B0200: JPSS CGS to SDS ICD	X_CG_SD-L00030
			IC60917-SEIT-003: JPSS ISF ICD	T DP SP-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T DP AU-L00040
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00300
			474-00423-B0200: JPSS CGS to GRAVITE ICD	T CG CV-L00030
			474-00411-B0200: JPSS CGS to NESDIS ESPC	X_CG_ES-L00030
			ICD	11_00_25 200000
S-NPP Spacecraft - Telemetry	RDRE-SCTP-C0031	HDF5		
			474-00410-B0200: JPSS CGS to CLASS ICD	X_CG_AD-L00030
			IC60917-SEIT-001: JPSS C3S to IDPS ICD	T_NE_MM-L00090
			474-00412-B0200: JPSS CGS to SDS ICD	X_CG_SD-L00030
			IC60917-SEIT-003: JPSS ISF ICD	T DP SP-L00045
			IC60917-SEIT-003: JPSS ISF ICD	
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T DP AU-L00300
			474-00423-B0200: JPSS CGS to GRAVITE ICD	T_CG_CV-L00030
			474-00411-B0200: JPSS CGS to NESDIS ESPC	X CG ES-L00030
			ICD	
JPSS-1 Spacecraft - Attitude and Ephemeris	RDRE-SCAE-C0031	HDF5		
•			474-00410-B0200: JPSS CGS to CLASS ICD	X_CG_AD-L00030
			IC60917-SEIT-001: JPSS C3S to IDPS ICD	T_NE_MM-L00090
			474-00412-B0200: JPSS CGS to SDS ICD	X_CG_SD-L00030
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_SP-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00040
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00300
			474-00423-B0200: JPSS CGS to GRAVITE ICD	T_CG_CV-L00030

Description	Data	File Type	Document	Interface Mnemonic
_			474-00411-B0200: JPSS CGS to NESDIS ESPC	X_CG_ES-L00030
			ICD	
JPSS-1 Spacecraft -	RDRE-SCTN-C0031	HDF5		
Telemetry				
			474-00410-B0200: JPSS CGS to CLASS ICD	X_CG_AD-L00030
			IC60917-SEIT-001: JPSS C3S to IDPS ICD	T_NE_MM-L00090
			474-00412-B0200: JPSS CGS to SDS ICD	X_CG_SD-L00030
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00040
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_SP-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00300
			474-00423-B0200: JPSS CGS to GRAVITE ICD	T_AU_CV-L00030
			474-00411-B0200: JPSS CGS to NESDIS ESPC	X_CG_ES-L00030
			ICD	
JPSS-2 Spacecraft -	RDRE-SCAE-C0032	HDF5		
Attitude and Ephemeris				
			474-00410-B0200: JPSS CGS to CLASS ICD	X_CG_AD-L00030
			IC60917-SEIT-001: JPSS C3S to IDPS ICD	T_NE_MM-L00090
			474-00412-B0200: JPSS CGS to SDS ICD	X_CG_SD-L00030
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_SP-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00040
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00300
			474-00423-B0200: JPSS CGS to GRAVITE ICD	T_CG_CV-L00030
			474-00411-B0200: JPSS CGS to NESDIS ESPC	X_CG_ES-L00030
			ICD	
JPSS-2 Spacecraft - Tememetry	RDRE-SCTN-C0032	HDF5		
			474-00410-B0200: JPSS CGS to CLASS ICD	X_CG_AD-L00030
			IC60917-SEIT-001: JPSS C3S to IDPS ICD	T_NE_MM-L00090
			474-00412-B0200: JPSS CGS to SDS ICD	X_CG_SD-L00030
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00040
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_SP-L00045
			IC60917-SEIT-003: JPSS ISF ICD	T_DP_AU-L00300

Description	Data	File Type	Document	Interface Mnemonic
			474-00423-B0200: JPSS CGS to GRAVITE ICD	T_CG_CV-L00030
			474-00411-B0200: JPSS CGS to NESDIS ESPC ICD	X_CG_ES-L00030
GCOM-W1 Spacecraft - Telemetry	RDRE-SCGW-C0031	HDF5		
			474-00410-B0200: JPSS CGS to CLASS ICD	X_CG_AD-L00030
			474-00411-B0200: JPSS CGS to NESDIS ESPC ICD	X_CG_ES-L00030
GCOM-W1 Spacecraft – Attitude and Ephemeris	RDRE-SCGW-C0032	HDF5		
			474-00410-B0200: JPSS CGS to CLASS ICD	X_CG_AD-L00030
			474-00411-B0200: JPSS CGS to NESDIS ESPC ICD	X_CG_ES-L00030

Appendix B. Common RDR Static Header Values

Table: B-1 Common RDR Static Header Values lists pre-defined unique values for the fields from the static header for each of the RDRs defined.

RDR Name	Sensor	TypeID	numAPIDs
S-NPP Spacecraft Telemetry	SPACECRAFT	TELEMETRY	30
S-NPP Ephemeris and Attitude	SPACECRAFT	DIARY	3
JPSS-1 Spacecraft Telemetry	SPACECRAFT	TELEMETRY	29
JPSS-1 Ephemeris and Attitude	SPACECRAFT	DIARY	3
JPSS-2 Spacecraft Telemetry	SPACECRAFT	TELEMETRY	TBD
JPSS-2 Ephemeris and Attitude	SPACECRAFT	DIARY	3
GCOM-W1 Attitude and Ephemeris	GCOM	DIARY	1
GCOM-W1 Telemetry	GCOM	TELEMETRY	2

Appendix C. DQTT Quality Flag Mapping

Appendix D. Abbreviations and Acronyms

See 470-00041 JPSS Program Lexicon for abbreviations and acronyms.

Attachment A. XML Formats for Related Products

Table: ATT-1 XML Formats for Related Products

File Number	XML Filename
N/A	